

## **Vehicle History Report**

#### **VEHICLE DETAILS**

Chassis number 1: GGH20-8042464

Manufacture date: 2010-11

Make: **TOYOTA** 

Model: **VELLFIRE** 

DBA-GGH20W Body:

Grade: 3.5Z

**Engine:** 2GR

Drive: 2WD

Transmission: AΤ Title information <sup>2</sup>:

Registered

Accident / Repair:

No problem

**Odometer rollback:** 



No problem

Manufacturer recall:



No problem

Safety grade <sup>3</sup>:



Contamination risk:



No problem

This vehicle does not qualify for Buyback Guarantee

**Average Market Price** 



Unfortunately, this vehicle does not qualify for our Buyback Guarantee program.



¥880,000

**About Buyback Guarantee** 

This CAR VX Vehicle History Report is based only on Information supplied to CAR VX, LTD and available as of 2023-02-20 07:36:14. Other information about this vehicle, including problems, may not have been reported to CAR VX, LTD. Use this report as one important tool, along with a vehicle inspection and test drive, to make a better decision about your next used car.

### **ACCIDENT / REPAIR HISTORY**

Problem type	Reported	Date reported	Data source	Details	Airbag
Collision	Not reported				
Malfunction	Not reported				
Theft	Not reported				
Fire damage	Not reported				
Water damage	Not reported				
Hail damage	Not reported				

## **ODOMETER READINGS HISTORY**

Date reported	Data source	Odometer reading (Km)
2019-11-11	MLIT	45300
2021-12-08	MLIT	79900
2023-02-18	USS HAA Kobe	87156

### **USE HISTORY**

Use in the contaminated regions <sup>4</sup> Radioactive contamination test fail <sup>5</sup> Commercial use

Not reported

Not reported

Not reported


### **DETAILED HISTORY**

Event date	Location	Odometer reading (Km)	Data source	Details
2010-11			TOYOTA	Manufactured
2010-11			MLIT	First registration
2019-11-11		45300	MLIT	Inspection
2021-10-18	Izumi		MLIT	Last registration
2021-12-08	Izumi	79900	MLIT	Inspection

2023-02-18 Hyogo 87156 USS HAA Kobe Auctioned

### **MANUFACTURER RECALL HISTORY**

Date reported Data source Affected part Details




#### **VEHICLE ASSESSMENT** •

#### **Overall Collision Safety Ratings**

Driver's seat		Front passenger's seat			
Points	Evaluation	Goal average	Points	Evaluation	Goal average
34.46	****	96%	23.51	****	98%

<sup>\*</sup> In order to accurately differentiate between the evaluations of different vehicles, a standard is set based on current technology. Up to 6 points out of 12 is given level 1 and the rest of the range is divided up into equal parts, which are respectively assigned to level 2 (more than 6 points but 7.5 or less), level 3 (more than 7.5 points but 9 or less), level 4 (more than 9 points but 10.5 or less) or level 5 (more than 10.5 points).

#### Braking performance tests 7



#### **VEHICLE SPECIFICATION**

1st gear ratio	3.300	2nd gear ratio	1.900
3rd gear ratio	1.420	4th gear ratio	1.000
5th gear ratio	0.713	6th gear ratio	0.608
Additional notes	NRTSK	Airbag position, capacity	-
Body rear overhang	1015	Body type	STATION WAGON

Chassis number embossing position	FRONT FLOOR CROSSMEMBER RIGHT SIDE ON SURFACE	Classification code	0059
Cylinders	6	Displacement	3450
Electric engine type	-	Electric engine maximum output	-
Electric engine maximum torque	-	Electric engine power	-
Engine maximum power	206/6200( NET)	Engine maximum torque	344/4700( NET)
Engine model	2GR	Frame type	SOLID STRUCTURE
Front shaft weight	1120	Front shock absorber type	
Front stabilizer type	TORSION BAR TYPE	Front tires size	235/50R18 97V
Front tread	1555	Fuel consumption	9.5
Fuel tank equipment	65	Grade	3.5Z
Height	1900	Length	4865
Main brakes type	HYDRAULIC TYPE, DISK HYDRAULIC TYPE, DISK	Make	TOYOTA
Maximum speed	180	Minimum ground clearance	170
Minimum turning			
radius	5.9	Model	VELLFIRE
_	5.9 DBA-GGH20W	Model  Mufflers number	VELLFIRE
radius			VELLFIRE
radius  Model code	DBA-GGH20W	Mufflers number	VELLFIRE 235/50R18 97V
radius  Model code  Rear shaft weight	DBA-GGH20W 820	Mufflers number Rear shock absorber type	
radius  Model code  Rear shaft weight  Rear stabilizer type	DBA-GGH20W 820	Mufflers number Rear shock absorber type Rear tires size	235/50R18 97V
radius  Model code  Rear shaft weight  Rear stabilizer type  Rear tread	DBA-GGH20W 820 - 1560	Mufflers number  Rear shock absorber type  Rear tires size  Reverse ratio	235/50R18 97V 4.148 MACHINE CAR WHEEL制動

Wheel alignment 2WD Wheelbase 2950
Width 1840


### **AUCTION DATA**

Date: 2023-02-18, Auction: USS HAA Kobe, Lot #: 37214

Date: 2023-02-18 Lot #: 37214 Auction name: USS HAA Kobe Region: Hyogo Make: **TOYOTA** Model: VELLFIRE 2010 Mileage (km): 87156 Reg. year: Displacement (cc): 3500 Transmission: ΑT Color: **BLACK** Model code: GGH20W 4 Result: available Auction grade: Problem type: No problem Problem scale: None Contaminated: OK No Airbag:

### **PHOTOS AND AUCTION SHEETS**

# プライムタイムコーナー

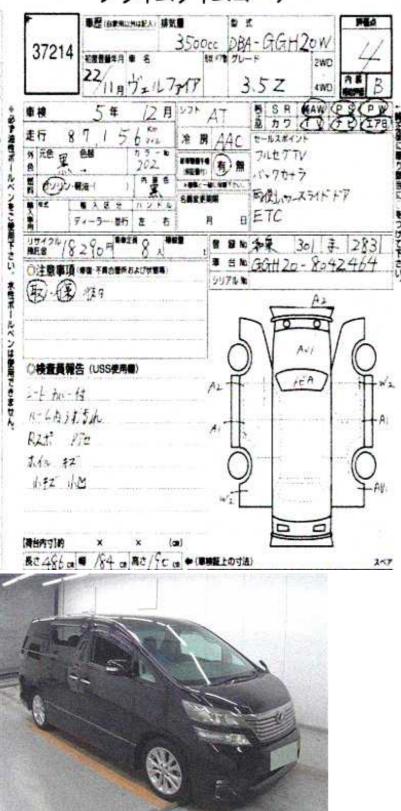



#### **GLOSSARY**

1 Chassis number – a unique identification number of the vehicle in Japan (same as VIN in the USA or Europe)

#### <sup>2</sup> Title information:

Registered – qualified for driving in Japan

Deregistered Temporarily – not qualified for driving in Japan, usually a temporary title during the ownership change

Deregistered Completely – not qualified for driving in Japan, the vehicle is determined to be scrapped Deregistered to Export – not qualified for driving in Japan, the vehicle is determined to be exported

<sup>3</sup> Determining the overall collision safety performance evaluation – For the driver's seat, the results of the full-wrap frontal collision test, offset frontal collision test, and side collision test are added together and evaluated to 6 different levels. For the Frontal passenger's seat, the results of the full-wrap frontal collision test and the side collision test (results for the driver's or the front passenger's seat are used) are added together and evaluated to 6 different levels.

Regular vehicle inspection – All vehicles in Japan must undergo regular vehicle inspections (shaken). New cars need to be tested after three years, and then vehicles must be tested every two years thereafter. A vehicle inspection (shaken) is compulsory for all vehicles with an engine size over 250cc. It ensures that all vehicles on the road are properly maintained and safe to drive. The test also checks that vehicles have not been illegally modified; if they are found to have been modified, they are not allowed on the road.

- <sup>4</sup> **Use in the contaminated regions** The Fukushima Daiichi nuclear disaster was a catastrophic failure at the Fukushima I Nuclear Power Plant on 11 March 2011, resulting in a meltdown of three of the plant's six nuclear reactors. As a result, some areas in the following prefectures were contaminated: Fukushima, Miyagi, Ibaraki, Tochiqi.
- <sup>5</sup> Radioactive contamination test radioactive contamination inspection that was started in July 2011 as a preventive measure for exporting contaminated vehicles from Japan. The inspection is being conducted since in all sea ports of Japan under the supervision of The Japan Harbor Transportation Association (JHTA).

MLIT - Ministry of Land, Infrastructure, Transport and Tourism.

- <sup>6</sup> Japan New Car Assessment Program the Ministry of Land, Infrastructure, Transport and Tourism (MLIT) and the National Agency for Automotive Safety & Victims' Aid (NASVA) have taken measures for safety, one of which is to assess commercially available vehicles through a variety of safety performance tests and release the resulting information compiled into the "New Car Assessment Program". The objective of Japan New Car Assessment Program is to increase the use of safe automobiles by providing an environment in which users can easily select such vehicles. This also promotes the development of safer vehicles by automobile manufacturers. Neck injury protection for rear-end collision performance test, rear seat passenger's protection for frontal collision performance test, rear passenger's seat belt usability evaluation test and seat belt reminder for passengers evaluation test are started in FY2009.
- <sup>7</sup> Braking Performance Tests Braking performance is determined by the shortness of the distance in which a vehicle can stop and the stability of the vehicle at the time of braking. This test is performed under wet and dry road conditions for a vehicle which has both a driver and a front passenger. The distance it takes for the vehicle to stop and the stability of the vehicle at the time of braking is evaluated for when the vehicle is stopped abruptly while traveling at a speed of 100km/h. The stopping distance and vehicle speed have been measured by using GPS since FY2009.

CAR VX, LTD DEPENDS ON ITS SOURCES FOR THE ACCURACY AND RELIABILITY OF ITS INFORMATION. THEREFORE, NO RESPONSIBILITY IS ASSUMED BY CAR VX, LTD OR ITS AGENTS FOR ERRORS OR OMISSIONS IN THIS REPORT. CAR VX, LTD FURTHER EXPRESSLY DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

© 2014-2023 Car VX Limited. All rights reserved.